


# light only short installation instruction



Step 1

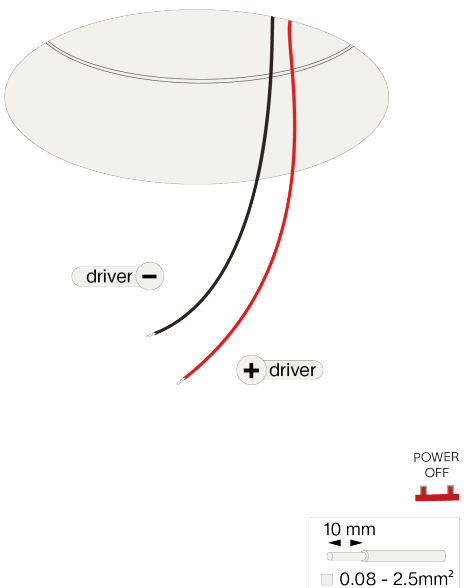

driver -

+ driver


POWER OFF

10 mm

0.08 - 2.5mm²


constant current (mA)	typical forward voltage (V)	typical power (W)
350	16,9	5,9
500	17,4	8,7

Step 2

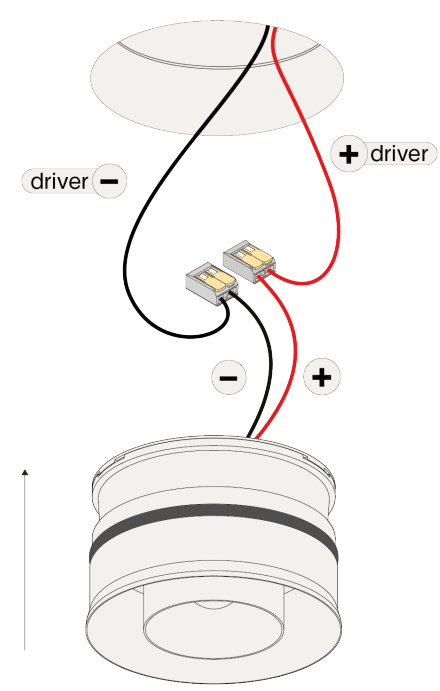

Connect the wires with the included connectors for serial connection, respect polarity combine with a prado LED-driver.

Step 3

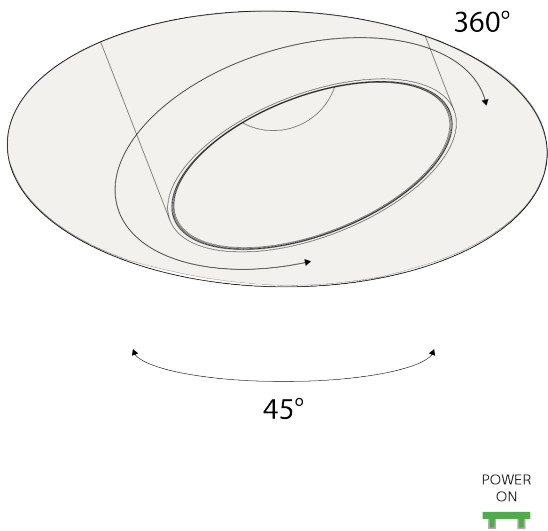

Twist the luminaire as desired.

			IP 44	CE			Replace glass lens when broken. Luminaire shall only be used together with glass lens.
--	--	--	-------	----	--	--	---